



Guardtech group

4

() Isopod

rapid cleanrooms



www.guardtech.com

Guardtech group



1

L

0

1)

0

-3

0100

2

Ù

1 33

15

(0)

Javara





Position:

Aluminium:

Size - 900mm x 1500mm:

°C

Quantity:

ISO5:

Levelling legs:

Ergonomic Chairs:

Transfer Hatch:

Rin

+/-

GRP:

Softwall - PVC Curtain:

Softwall - ESD Curtain:

Quantity:

Storage Cabinet:

Trolley Hatch:

°C

Email address:

IS0 rapid cleanroom

QUICK-ASSEMBLY 6 Shipped Worldwide WIDE RANGE OF CONFIGURATIONS AVAILABLE 🕝 CAN BE 'POPPED UP' IN ANY HOST ROOM



ISOPOD is a revolutionary concept in modular cleanroom design & build. Isopods are high-performance controlled environments which can be rapidly self-assembled and are fully customisable to best utilise the host room they are installed within. Combining high-quality construction materials with state-of-the-art cleanroom technology, lsopods

are the perfect solution to upgrading Production environments, R&D applications, Education or Healthcare facilities in a sustainable, practical and cost-effective way.

Isopods can be reconfigured, relocated, extended and upgraded - growing alongside your business, evolving with your needs. Shipped worldwide ready for quick and simple self-assembly, supported by full installation instructions and demo

movies Alternatively these can be delivered & installed quickly by Guardtech's experienced Isopod engineers.

- Šhips worldwide for self-assembly • Can be reconfigured, relocated and extended
- Available as hardwall, softwall
- or hybrid cleanroom
- Changing room/materials interlock modules
- Can be static or mobile on casters • Can be upgraded or modified as
- your business grows
- Energy efficient only control the
- area that requires it • Can be branded in corporate
 - colours, logo, graphics • Removable panels for equipment transfer
 - Glazing can be added to hardwall

Telephone:

Site address

Company:

Grade 304 stainless steel:

Size - 900mm x 900mm:

Strip curtain:

Yes:

IS08:

N/A:

N/A:

Castors:

Sink

Self-assembly:

Stepover Bench

Laminar Flow Unit:

Garment Rail:

500 - standard:

Hardwall - composite modular panels:

No:

IS07:

Yes - temperature:

Yes - quantity:

Levelling castors:

Trespa Work Bench:

Steel doors:

IS06:

1000 - inspection:

Guardtech installation:

Coat Hooks:

Biological Safety Cabinet:

Name:

Location:

Project target completion date Quotation required by (date) Cleanroom length (mm) Cleanroom width (mm) Cleanroom height (mm) Personnel Airlock (PAL) (mm) Materials Airlock (MAL) (mm) Framework Walls Windows required **Doors required Vinyl floor Classification** Temperature control Lighting (lux level) 13-amp double sockets **Castors** Assembly **Furniture (quantity) Equipment (quantity)**

Host room information

Other important information

Press play for video content

CONTENTS

PAGE 4 – Enquiry form **PAGE 5 - Isopod introduction** PAGE 6-7 – Structural PAGE 8-9 - Mechanical & Electrical PAGE 10-11 - Furniture & Equipment **PAGE 12 - Materials list PAGE 13** – Configurations PAGE 14-19 - Case Studies



BASE MODEL TYPES

Isopod





DOORS

Choice of doors available: rapid rise doors – PVC curtain with stainless frame and GRP or powder-coated steel personnel doors with stainless steel push plate, kick plate and handle with 400mm x 400mm vision panel. All Guardtech doors can be electromagnetically interlocked. Also available as a fully flush system with recessed base for flooring to cove into.

Press play for

/ideo content

GLAZING

Isopod glazing panels are available in two standard sizes for the Hardwall and Hybrid models – 900x900mm or 1500x900m. Custom arrangements may be possible – please speak to a member of the Isopod team about your requirements so we can help find the best solution.

Homoger reinforced v polyureth

Panelled ceiling with thermal insulation core provides a flush surface. Lighting and filtration modules are recessed into apertures or surface mounted for laboratory applications.

FLOORING

Homogenous vinyl floor reinforced with cross-linked polyurethane, UV-cured, hot-welded joints. Coved 100mm up the wall over underlay former and capped. Copper-grounded anti-static vinyl also available.

6

COVING



Powder-coated CR4 mild steel panels with polyisocyanurate (PIR) insulated core and interlocking joints. The panels feature a 50mm thickness to form walls and ceiling. Highly durable, cleanable and chemically resistant, the walls are silicon sealed.



FRAME

ISOPOD

All three versions of the Isopod come with a more lightweight aluminium frame as standard, but there is the option to upgrade to a grade 304 stainless steel frame. The framework is held together by specially made connectors, designed solely for these products and tested rigorously by experience Guardtech's in-house engineers.



STRIP CURTAIN

Guardtech's Softwall and Hybrid Isopods feature a strip curtain, designed to overlap and create a flexible wall for cleanroom applications. This lightweight PVC curtain is suspended by a stainless steel plate and attached to a stainless steel hanging rail, Available in the following thicknesses and widths: 2mm thickness x 200mm width or 3mm thickness x 300mm width.

MECHANICAL & ELECTRICAL





15.7" touchscreen HMI+PLC provides a full control and monitoring system for your Isopod Rapid Cleanroom. Environmental Monitoring System feeds back to give real time data on temperature, humidity and pressure. Fan speeds and HVAC systems can be controlled as well as other compatible equipment.

 $\left[\right]$

HVAC

Temperature control via VRF (variable refrigerant flow) split system. Humidity control also provided via upflow units or separate desiccant wheels. External condensers can be contained in attached plant rooms or mounted on Isopod exterior.



and generators housed directly within the

cleanroom or lab – or in an enclosed plantroom Pipework, point of use fittings, regulators and

hook-up connections can also be put in place.

EXTRACTION

Guardtech

Chemicals, airborne particulate and heat can all be extracted to a localised filtration unit for scrubbing. Safe change modules can also be placed on the exhaust system to mitigate the risk of cross-contamination.



8

Isopod

All Isopod Rapid Cleanrooms can include stainless steel or white plastic 13-amp sockets mounted flush. CAT6 network sockets and 16amp or 32amp three-phase outlets are also available in the range.



a water and

1200.30

Powder-coated steel light units, flush mounted into the ceiling panels with drop-down hinged diffuser. Also available as surface-mounted aluminium LED batten luminaires for laboratories. Activation by switch or PIR (passive infrared) sensor. Lights can be UV filtered for photo sensitive processes.

FILTRATION

For ISO 14644 compliant environments, Fan Filter Units (FFU) with H14 HEPA filters and G4 pre-filters provide 1,000m³/hour of filtered air. For ceiling heights of 2.1m slimline FFUs are installed in the ceiling to provide vertical laminar flow. Depending on the specifications of your chosen model, Isopods can achieve a classification up to ISO5.



ENVIRONMENTAL MONITORING


Guardtech provide a fully integrated Environmental Monitoring System that can also be 21CFR Part 11 compliant. With a range of high-performance multifunction sensors, temperature, humidity and pressure can all be monitored in real time and recorded for an audit trail. Fully flush or semi flush LED display gives in-room feedback





For cleanrooms Guardtech install sockets and services flush to the panel system with containment embedded within the panel core. For laboratories, three-compartment PVC trunking is used for flexibility of socket positioning and cost effectiveness.

9

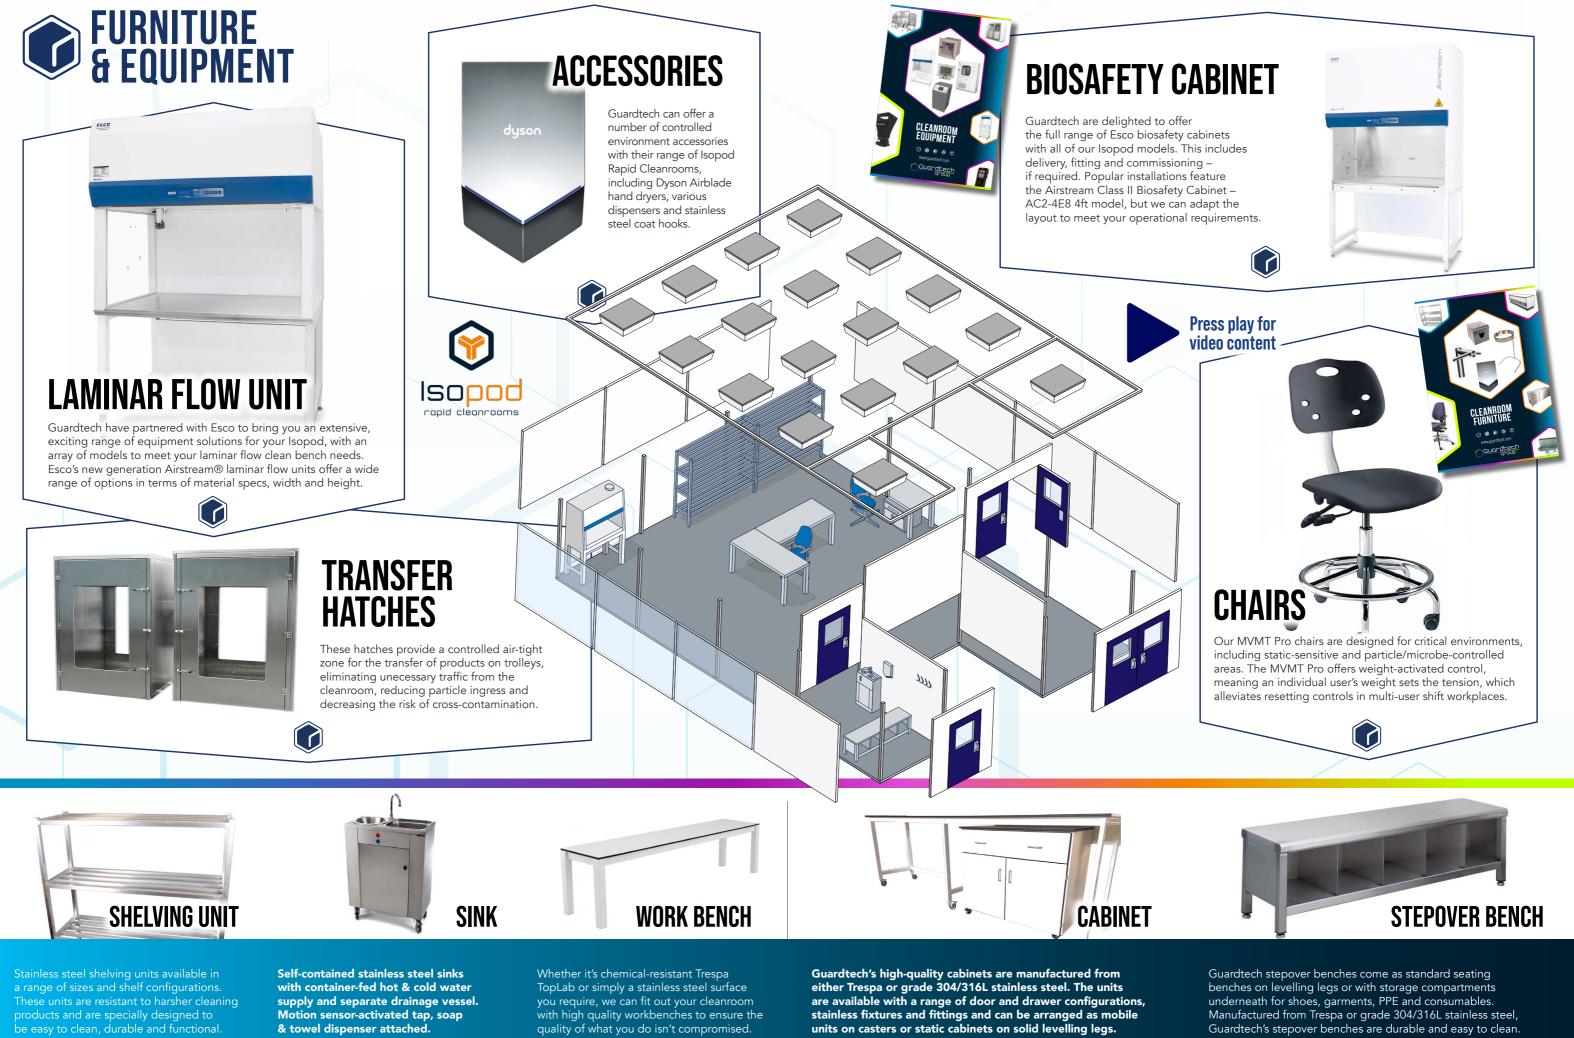


MATERIALS & CONFIGURATIONS



Isopod rapid cleanrooms

Isopod Rapid Cleanrooms are available in 15 different size configurations. Choose either one or more of the following standard-sized pods that best suit your application, then configure the internal fit-out to meet your needs. Finally, either construct the Isopod yourself or book in our Install team to do it for you. Join as many units together as you require to construct your perfect rapid-assembly controlled environment.



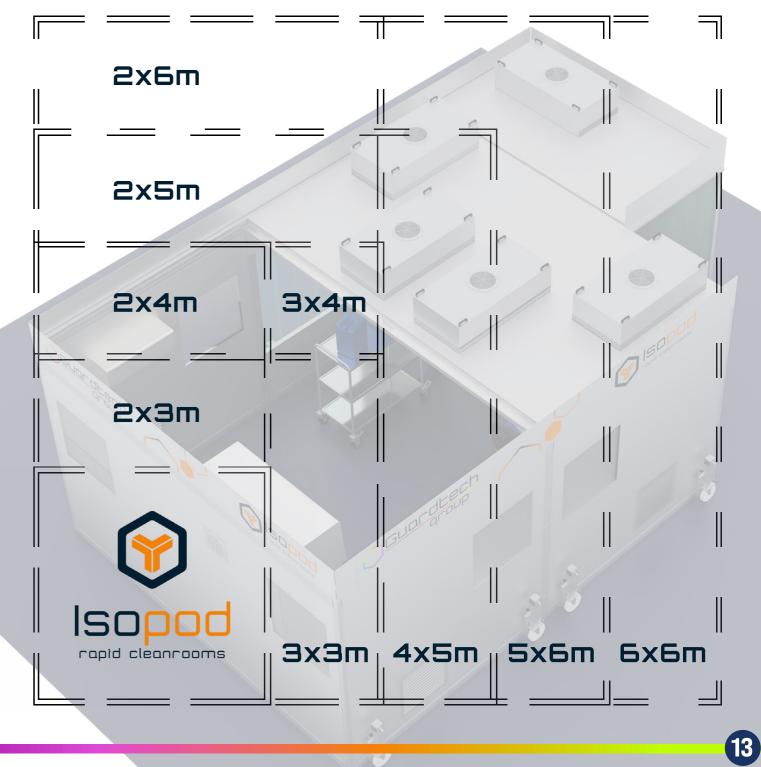

Isopod **COMPONENTS** Stainless steel frame Modular composite

ceiling & wall panels

- **Vinyl flooring (optional)**
- Powder-coated steel doors
- LED lighting panels
- AC fan filter units
- **Window panels**
- 13-amp power sockets

ISOPOD CONFIGURATOR

Build your own cleanroom with the Guardtech Group's revolutionary online Configurator tool. Simply head to **www.iso-pod.co.uk** and select the different structural, mechanical, electrical, furniture and equipment options you want in your Isopod Rapid Cleanroom.

Visit www.iso-pod.co.uk to build your own cleanroom now



CONFIGURATIONS There are 15 Isopod size variations in the range

2x4m 3x5m 3x6m 3x4m 4x5m 4x6m 4x4m SxSm Sx6m 2x5m 2x6m 6x6m

Guardtech CLIENT CASE STUDY LECTRONICS ISOPODS ΕI





THE CLIENT

KLA – whether it's a driverless car, VR experience, or factory robotics, KLA help turn theory into possibility, helping to create technological devices and ideas that transform the future and shape our current life. KLA are often part of the most significant technological breakthroughs. Virtually no laptop, smartphone, wearable device, voice-controlled gadget, flexible screen, VR device or smart car would have made it into your hands without KLA's input.

THE BRIEF

KLA originally requested a proposal for 2 x ISO7 Softwall cleanrooms for installation at one of their sites in Denmark. After further scrutiny of the brief and consultation, Guardtech proposed an upgraded solution that utilised more robust components to allow some pressurisation in the room, more in line with Isopod Hardwall modules.



21+/-3





"Full credit to the Design and Install teams..."


"Full credit must go to the Guardtech Group Design and Install teams for rorking so well together to firstly plan nese amazing bespoke Isopods back a


verything went and wish the clie ith their future endeavours "

Elliott Pearce Isopod Rapid Cleanrooms Project Manager





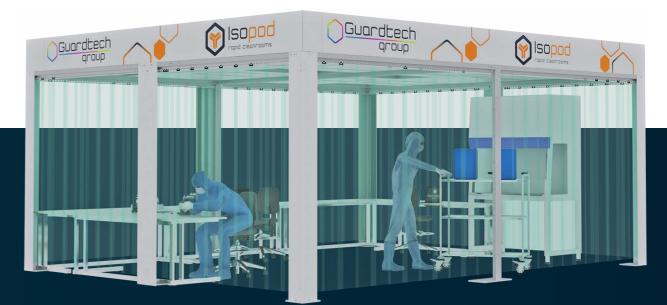

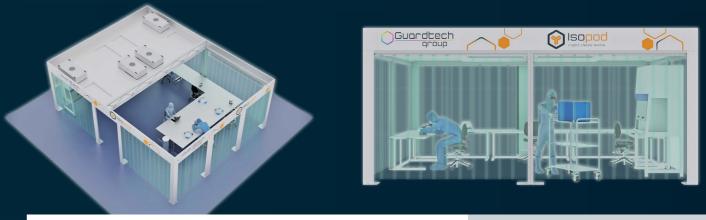

THE TECH SPECS

A controlled environment designed, installed, cleaned and commissioned by Guardtech built to the following specification:

Structural: GT Strip Max PVC strip curtain – 300mm wide/3mm gauge with an inter-nal height of 2.5m, GT Lid Pro panelled ceiling, Aluminium 50 x 50 x 3mm Box Section frame with Grade 304 stainless steel connectors.

Mechanical: GT Flow Plus Fan Filter Units (FFUs) with H14 HEPA and G4 Filters achieving 70 air changes per hour, GT Air Lite condenser-free wall-mounted HVAC unit.

THE CHALLENGES

The host room: One of the biggest challenges upon arriving at the premises in Denmark was attempting to maximise the Isopod size within the room.

Because the Isopods were so close to the walls of the host room, the Guardtech Group Installation team had to ensure all fixings could be accessed from inside the room.

Notch your usual ceiling: Because of the limitations of the tight host room and the restricted access to ceiling supports, the Guardtech Installation team had to be creative, implementing a 'notch' in some of the stainless steel to ensure the panelled ceiling construction was not compromised in any way.

Transport trouble: The delivery of the two Softwall Isopods from Suffolk to Denmark was delayed a few days due to transport issues, meaning the Guardtech Installation Engineers had to work diligently to pull the schedule back in line with expectations.

THE RESULT

Isopod Rapid Cleanrooms Project Manager Elliott Pearce said: "It was such a pleasure to be involved in leading this fantastic project for a client conducting pioneering work in their field. "Full credit must go to the Guardtech Group Design and





Install teams for working so well together to firstly plan these amazing bespoke Isopods back at our Suffolk HQ before the installation in Denmark.

"We were really pleased with the way everything went and wish the client well with their future endeavours."



CLIENT CASE STUDY MEDICAL DEVICE ISOPODS



Ň



THE CLIENT

THE BRIEF

Oval were looking to

Oval Medical Technologies Ltd - a world class drug delivery business specialising in the development of autoinjector platforms with a strong patient focus. Oval designs, develops and industrialises autoinjectors that include integrated, customised primary drug containers. Oval's enabling autoinjector technology provides consistent delivery performance for a wide range of formulation viscosities.





enhance the capability of their development lab to incorporate a new upgraded part of their process, opting for two conjoined 6m² Softwall Isopods. Oval had specific challenges within the room that precluded them from opting for a standard Isopod, therefore we were charged with designing two bespoke connected units.



CAMBRIDGE



ISOPOD

0 Gorder

From About on

CAMBRIDGE PHARMA



THE TECH SPECS

A controlled environment designed, installed, cleaned and commissioned by Guardtech built to the following specification:

• Structural: Grade 304 stainless steel frame with anti-static PVC strip curtain.

• Electrical: LED lighting panels to provide an average of 500 lux at bench level.

Mechanical: Filtration provided by H14 HEPA filters powered by Fan Filter Units.

Monitoring: Pressure monitoring from magnehelic gauges.

THE CHALLENGES

Internal ceiling height: Space may have been at a premium – but this wasn't a major obstacle for Guardtech. The team opted to use slimline Fan Filter Units in order to create the tallest internal ceiling that could be achieved for the Isopods.



°00

.....

Structural: The client wanted the units to be mobile, and so wheels were fitted. As a result, we needed to put structural reinforcement in place to reduce the risk of splay. Structural calculations were made to ensure the outward force was offset by adequate bracing.

Equipment transfer: The client needed to move equipment between the two Isopods, which meant the Installation team needed to incorporate a removable bar at the bottom of the Isopods. This enabled us to retain the structural bracing while



accommodating the need for equipment transfer.

THE RESULT

Guardtech Commercial Director Mark Wheeler said: "The team enjoyed tackling the various challeng-es that this bespoke Isopod build presented.

"Many of the lessons we learned on this project, and the new ideas we implemented for these bespoke Isopod models, have been incorporated into our ongoing development plans for the standard product range. This should prove to be extremely valuable in helping us to develop the best possible product for the widest range of future users."





CLIENT CASE STUDY

PACKAGING HYBRID ISOPOD





THE CLIENT

Oxford Packaging Solutions Ltd - packaging specialists based in Oxfordshire, built on a heritage of producing high-quality plastic containers for the Food & Drink, Personal Care, Household and Medical sectors. The company specialises in precision blow moulding and works in PET, RPET, PP and HDPE materials.


THE BRIEF

Guardtech were charged with providing a relatively small-sized modular cleanroom solution for use within a warehouse space. The controlled environment needed to be not just mobile, but easily moved. This led to the development of a bespoke Isopod **Rapid Cleanroom on pump-action** castors.

The Isopod would be used mainly for the client's injection moulding process, producing bottles to be used for liquid filling for food, medical use and beyond. The client required a rapid solution because of a spike in demand that they needed to capitalise on.







"We learned a lot about new effective practices with this project..."

Commercial Director Mark Wheeler said: "This was a challenging bespoke Isopod build which had to be put together in a busy facility for a client whose services were in high demand. "We learned a lot about new effective practices with this project, which will certainly stand us in good stead for future bespoke Isopod projects."

> **Mark Wheeler** Guardtech Group Commercial Director

OXFORD PACKAGING









THE TECH SPECS

A controlled environment designed, installed, cleaned and commissioned by Guardtech built to the following specification:

◆ Structural: GT Shell Plus PIR wall panels, GT Strip Lite PVC curtain, GT Lid Plus PIR suspended ceiling panel system, grade 304 stainless steel framework, 12 x jacking legs with castors, Melaphone speech panels.

• Electrical: GT Lux Lite LED lighting panels, 13amp plug sockets flush mounted.

• Mechanical: GT Flow Plus H14 HEPA Fan Filter Units with G4 pre-filters providing 200 air changes per hour.

• Monitoring: GT Scan Lite magnehelic gauge environmental monitoring system (EMS).

THE CHALLENGES

Bridging a gap: The Design team were tasked with developing a Hybrid Isopod featuring both cleanroom panels

and a softwall section as the client needed the cleanroom to incorporate a conveyor to bridge the outside of the room with the inside of the Isopod. With this bespoke design, the Isopod needed to be designed with careful consideration regarding the equipment it would be serving.

Level best: The entire structure was built on 12 levelling castors to ensure the Isopod could be jacked up and down to move it around effectively. The Isopod team therefore needed to consider the impact that the moving parts would have on the design of the room.

Working warehouse: The Install team had to build the Isopod within the confines of a busy working environment - an operational warehouse with all the rigorous staff and safety precautions and expectations of a highly professional outfit. The Guardtech team had to be professional, diligent and understanding of the clients' process flow – with an extra consideration on being as tidy as possible in an operational production environment.

THE RESULTS

Commercial Director Mark Wheeler said: "This was a challenging



bespoke Isopod build which had to be put together in a busy facility for a client whose services were in high demand.

"We learned a lot about new effective practices with this project, which will certainly stand us in good stead for future bespoke Isopod projects."















Guardtech House Unit 1A Homefield Road, Haverhill, CB9 8QP



0330 113 0303



sales@guardtech.com



.....

www.guardtech.com www.iso-pod.co.uk

Guardtech

